

GRS UltraFix Adhesive application guide

1. Precautions

Before using UltraFix products, it is recommended to wear protective goggles and gloves. Use in a well ventilated area, preferably outdoors. If this is not possible, respiratory protective equipment is recommended. Highly flammable product. Keep away from open flames and other heat sources



2. Preparation

Make sure that the application area is free of dust and dirt. At least one of the two surfaces must be porous. Can be applied in wet conditions. In case of rain, remove excess water accumulated before applying the adhesive.


3. Application

Once the adhesive has been applied to the strip and the two pieces of artificial turf have been joined together, it is not necessary to apply any weight, **but it is very important that the entire joint is immediately well pressed down**. In 10 minutes you can continue to work on top of it, and in 15 minutes you can brush it. Curing is completed within 24 hours.




4. How to use the GUN to apply GRS UltraFix Glue

Flow regulator

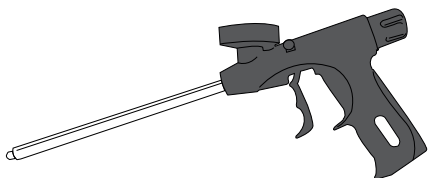

Ensure that the flow regulator is fully closed by locking the trigger.

Remove the safety cap from the product can and screw the gun on, making sure that the adhesive can is upside down and the gun is upside down. Screwing the gun in more tightly than necessary could damage the gun.

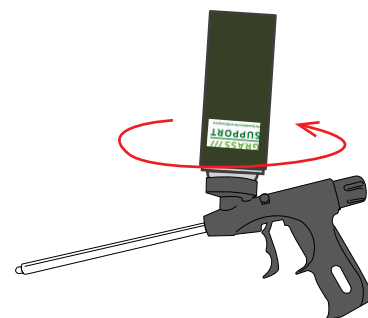

Approx. 5 seconds

It is very important that, before applying the adhesive, the can is shaken vigorously about 20 times (for approx. 5 seconds). This ensures that the adhesive sticks better.

Adjust the flow regulator on the back of the gun to your preference. If the regulator is too open, the product will come out faster, with more quantity, and will be more difficult to control.